
ALSAFLOOR



LAMINATE FLOORING 2020

At Alsapan

we manufacture 3 types of flooring

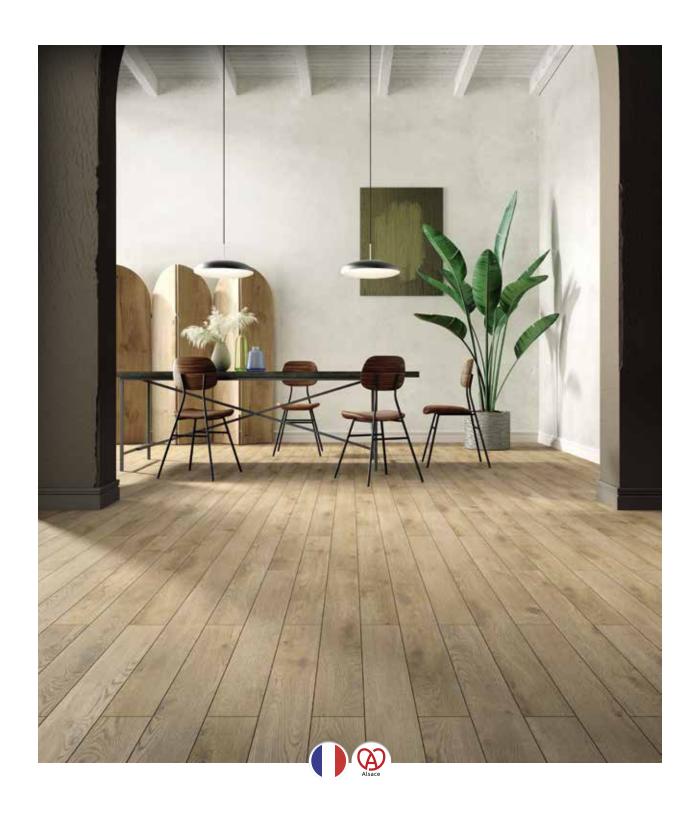

LAMINATE FLOORING



RIGID VINYL



ENGINEERED WOOD



A family-run company located in Alsace, in eastern France, was founded in 1972 by Joseph Strub, a carpenter by trade. It now operates 6 manufacturing facilities in France, producing millions of kit furniture units and worktops every year.

830 SKILLED EMPLOYEES



Innovation

IN 2020

Alsapan has decided to innovate some of its most aesthetic decors!



By the acquisition of **2 new synchronised decors**, ultra-matt imitating to perfection the most beautiful wood grains!

By acquiring a new ultra-matt structured metal press-plate to accentuate the most beautiful wood finishes.



An environmentally-conscious company

Innovation, research, and eco-responsibility have always been part and parcel of our corporate DNA. Our innovations aim to reduce wood consumption and minimise our products' impact on the environment.

Our R&D sets out to continually heighten customer satisfaction and it is through you that we can show consumers our collections of easy-living products, within reach of all budgets.

All Alsapan flooring products are **PEFC™ certified**. The wood used in our flooring is sourced from sustainably-managed forests - we never use exotic woods or wood from tropical forests. Our production facility is geographically close to our raw material suppliers and retail outlets, which allows us to reduce shipping distances and CO₂ emissions. Our Marlenheim facility is exemplary in its **environmentally-responsible actions**, which help maintain our planet's natural resources.

Its roof is fitted with solar panels,

Employees are actively seeking to reduce paper consumption and to recycle it,

The plant uses production waste products as an energy source for heating the buildings and the machines

A+, for a healthy habitat!

Introduced on 1 January 2012, the **health safety labelling** on product packaging gives consumers details of the amount of volatile substances released into the interior air by flooring and is ranked on a scale from Class A+ (very low emissions) to Class C (high level of emissions).

ALSAFLOOR products are ranked A+, with a formaldehyde emission rate of well under 10 μ g/(m² x h), based on tests performed by an independent laboratory.







'Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).



Black and White



161 White pine



410 Alpes' oak





553 Black charleston



544 Wood stain oak



557 Black pine















541 Coco oak




542 Aronia oak











Naturals



450 Nature oak



529 Almond oak



456 Provence oak



535 Praline oak



514 Namur



702 Aristotle









471 Sunset



Associated colours



Grey



153 Celtic oak



536 Linen oak



157 Guérande



448 Grey oak



183 Everest



701 Plato





437 Grey building



619 Sardinia oak











Dark colours



140 Congo oak



520 Chocolate walnut



420 Taza oak



528 Chestnut oak



447 Malt oak



622 Balearic oak













620 Corsica oak



625 Corfou









Contents

Pages 9 to 11

THE UNUSUALS

Page 10 Page 11 **HERRINGBONE**

RANDOM WIDTH PATTERN

Pages 12 to 17

12 mm

Page 13

FORTE

Pages 14 & 15

SOLID PLUS

Page 16

SOLID CHIC

Page 17

SOLID MEDIUM

Pages 18 to 24

8 mm

Page 19

OSMOZE MEDIUM

Pages 20 & 21

OSMOZE

Pages 22 & 23

CLIP 400

Page 24

VINTAGE

Page 25

8mm water resistant

Page 26

HARMONIE

Page 27

HARMONIE MEDIUM

Pages 28 to 38

PATTERNS

Page 39

STRUCTURES

Pages 40 & 41

TECHNICAL FEATURES

Page 42

PRODUCT RANGES

Page 43

PICTOGRAMS

Pages 44 to 47

TO GO FURTHERTHE ACCESSORIES

Pages 44 & 45

VINYL

Page 46 Page 47

ENGINEERED WOOD

THE UNUSUALS



HERRINGBONE | RANDOM WIDTH PATTERN







HERRINGBONE

REINVENTED CLASSIC INSTALLATION.



 All the charm of traditional parquet flooring but using contemporary plank sizes and designs!















To make life easier it is now possible to order pre-cut triangle starter kits.



Scan this code to retrieve the Alsafloor flooring calculator and view an explanatory video on how to install Herringbone flooring!



In-Registered texture



In-Registered and heliochrome











TECHNICAL FEATURES



width: 143 mm

length: 640 mm



RANDOM WIDTH PATTERN

MAKE UNIQUE PATTERNS BY MIXING PLANK WIDTHS.



A plank width for every room in the house, which you can combine:

- SOLID PLUS with a width of 214 mm: for larger rooms.
- SOLID CHIC with a width of 172 mm: sophisticated and smart, it goes anywhere in the home.
- SOLID MEDIUM with a width of 122 mm: a slim, elegant plank suitable for smaller rooms.















Scan this code to retrieve the Alsafloor flooring calculator.



In-Registered texture



In-Registered and heliochrome





619











12 mm



FORTE | SOLID PLUS | SOLID CHIC | SOLID MEDIUM









FORTE

A PLANK 214 MM WIDE, WITH NO BEVELS.

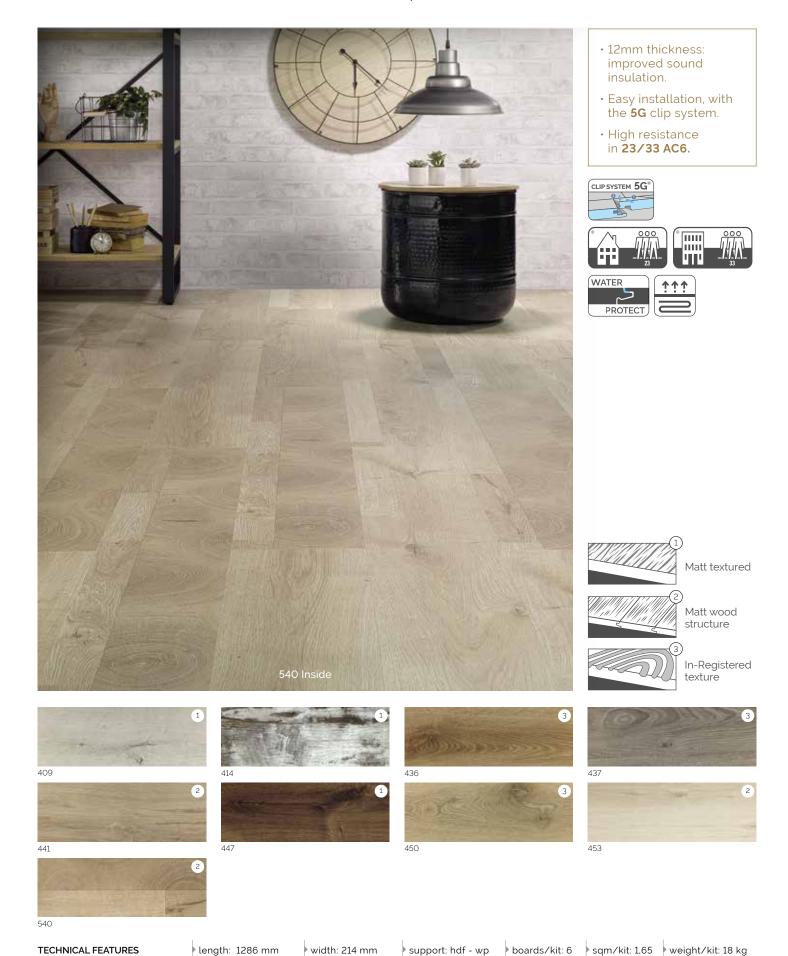

SOLID PLUS


A SYNCHRONISED FINISH, 214MM WIDE, GIVING A HIGHLY REALISTIC WOOD EFFECT!

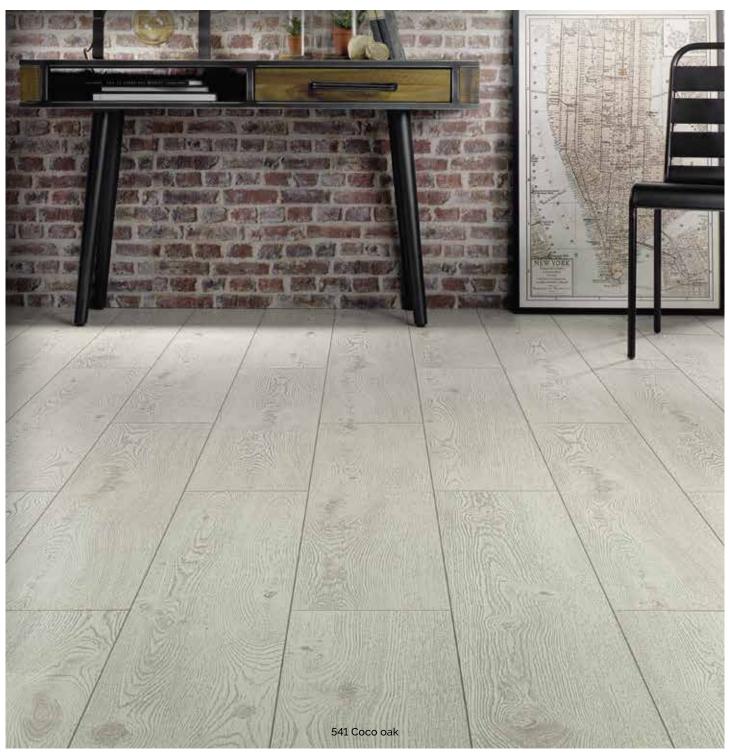

- A **214 mm** plank width, suitable for large rooms.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC6
- Bevelled on the **4 sides**.

TECHNICAL FEATURES

• 12mm thickness: improved sound insulation.














In-Registered and heliochrome

SOLID PLUS

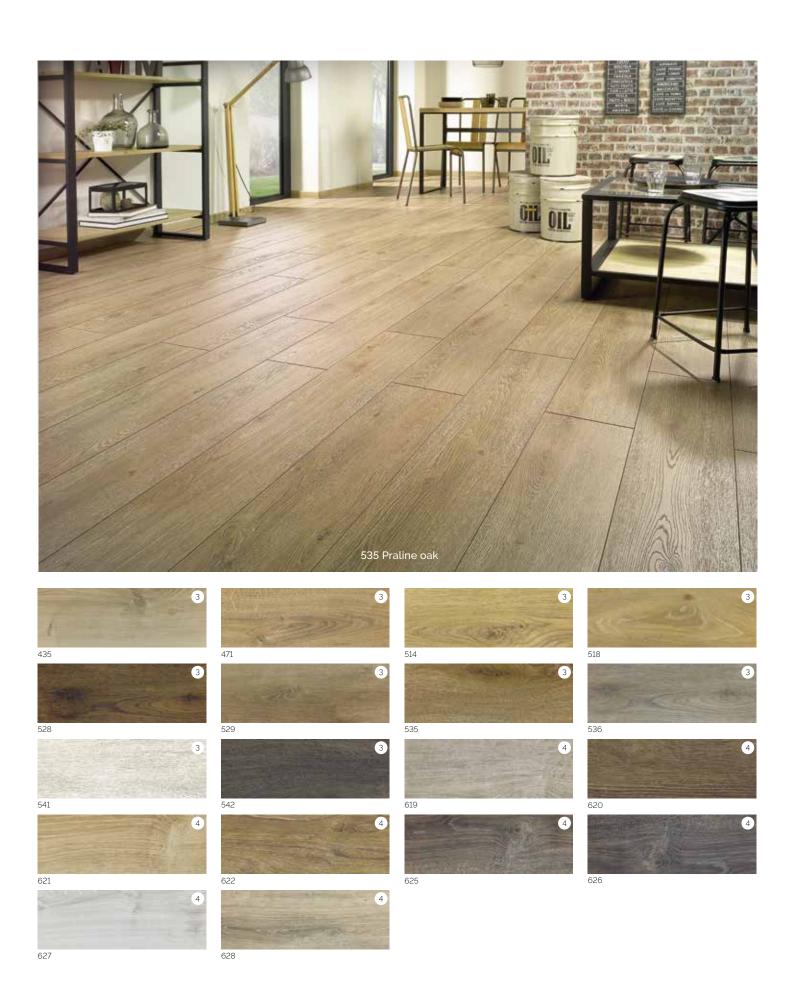

SOLID CHIC

AN ELEGANTLY SMART PLANK, 172MM WIDE, WHICH GOES WITH EVERY ROOM!



- Bevelled on the 4 sides.
- 12mm thickness: improved sound insulation.
- Easy installation, with the **5G** clip system.
- High resistance in **23/33 AC6**.













In-Registered texture



In-Registered and heliochrome















support: hdf - wp

boards/kit: 6 sqm/kit: 1,33 weight/kit: 14 kg

TECHNICAL FEATURES

length: 1286 mm

width: 172 mm

SOLID MEDIUM

A SLIM PLANK, 122MM WIDE, IDEAL FOR SMALLER ROOMS.



- Bevelled on the 4 sides.
- 12mm thickness: improved sound insulation.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC6.















Matt textured



In-Registered texture



In-Registered and heliochrome









471







TECHNICAL FEATURES





support: hdf - wp

8 mm



OSMOZE MEDIUM | OSMOZE | CLIP 400 | VINTAGE







OSMOZE MEDIUM

OSMOZE NOW ALSO COMES IN SLIM PLANKS, 122MM WIDE.



- An outstandingly realistic in-registered structure!
- An **8 mm** plank thickness designed for installation in all types of interiors.
- · Bevelled on the 4 sides.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC5.













It is possible to mix both Osmoze and Osmoze Medium planks to give a mixed-width layout!




















OSMOZE

AN IN-REGISTERED FINISH, 192MM WIDE, GIVE A HIGHLY REALISTIC PARQUET EFFECT!




- An 8 mm plank thickness designed for installation in all types of interiors.
- Bevelled on the 4 sides.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC5.





In-Registered texture

OSMOZE

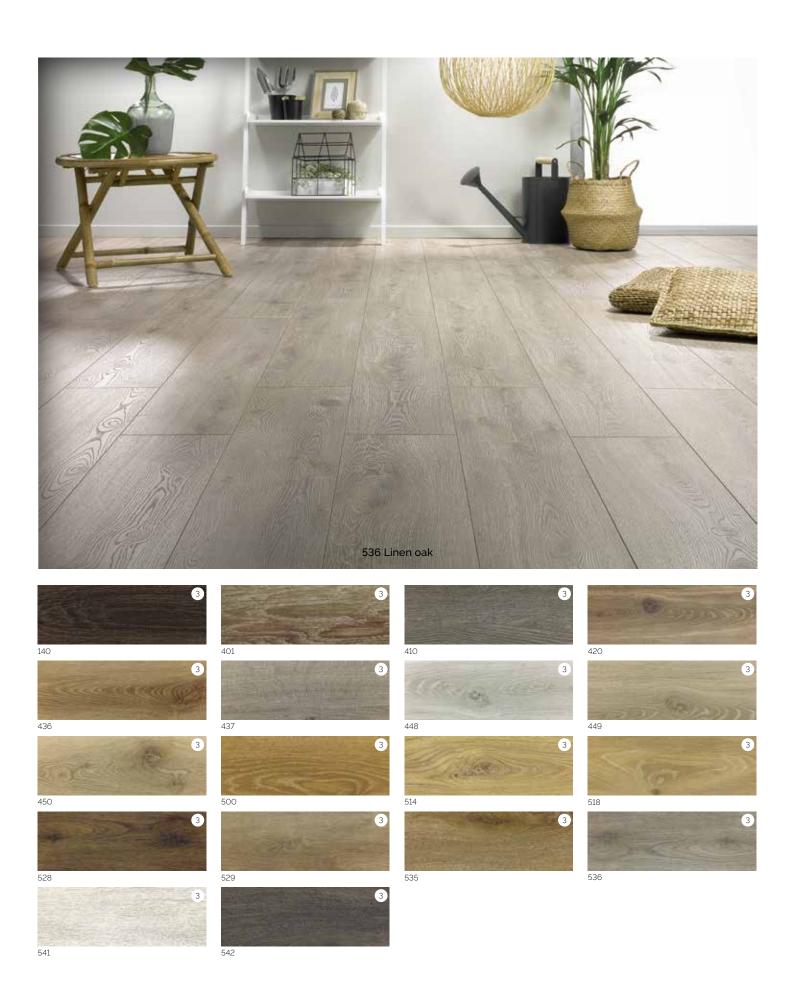


CLIP 400

A WIDE CHOICE OF COLOURS TO SUIT EVERY TYPE OF PROJECT.



- An **8 mm** plank thickness designed for installation in all types of interiors.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC5.










In-Registered texture

CLIP 400

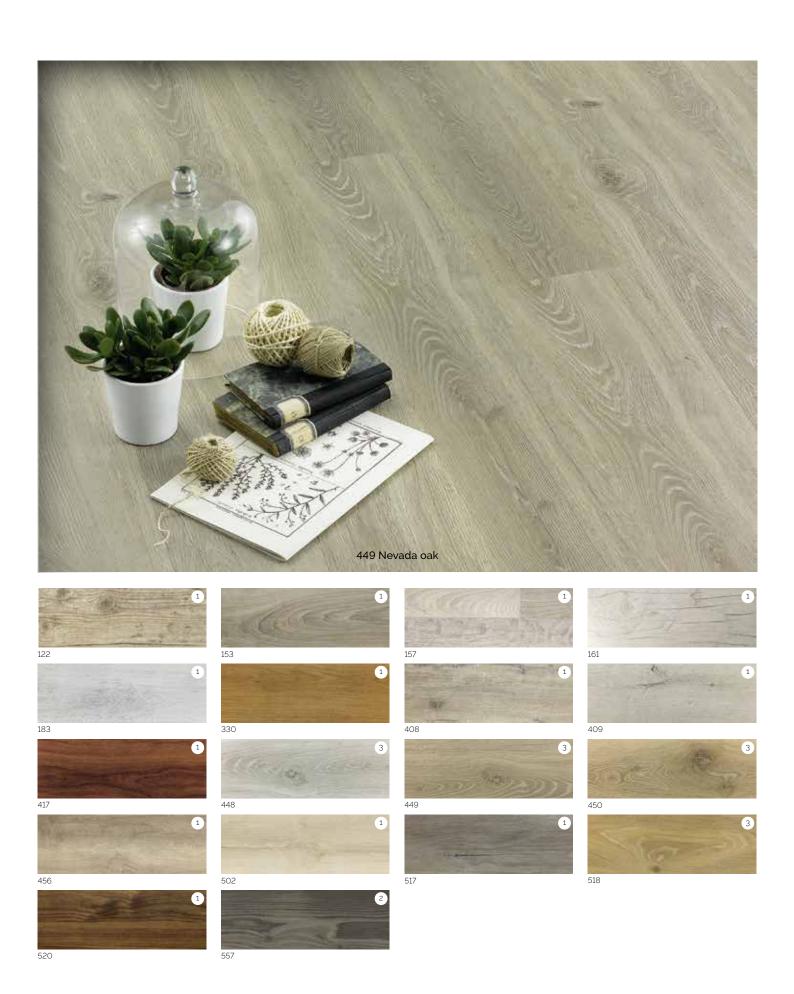

VINTAGE

AVAILABLE IN UNIQUE COLOURFUL FINISHES 192MM WIDE!



- · Bevelled on the 4 sides only for the 512 and 552 decors.
- · An **8 mm** plank thickness designed for installation in all types of interiors.
- Easy installation, with the **5G** clip system.
- · High resistance in **23/33 AC5**.





Only for 512 and














Matt textured



Matt wood structure






















TECHNICAL FEATURES length: 1286 mm width: 192 mm

support: hdf - wp

boards/kit: 9 sqm/kit: 2,22 weight/kit: 16 kg

8MM WATER RESISTANT

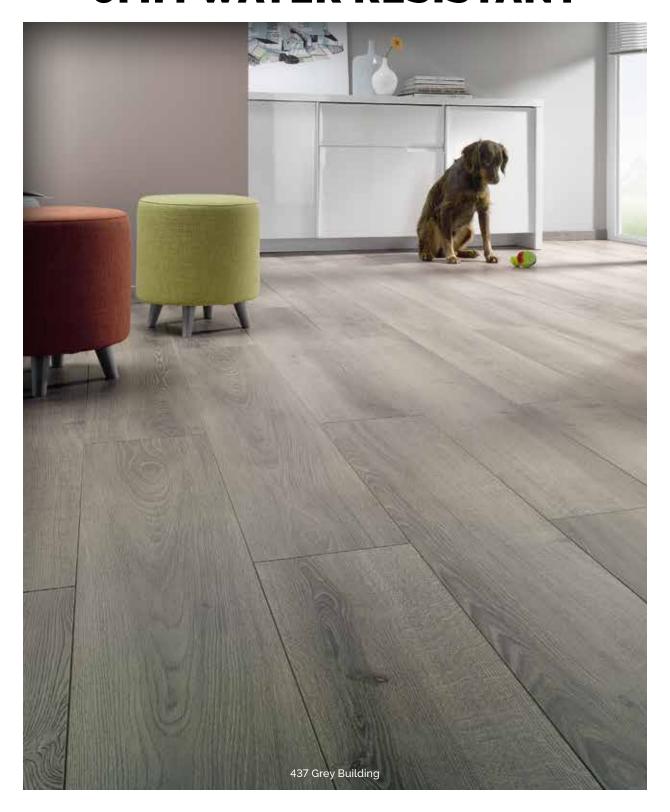

HARMONIE | HARMONIE MEDIUM












WATER RESISTANT PLANKS 192MM WIDE!

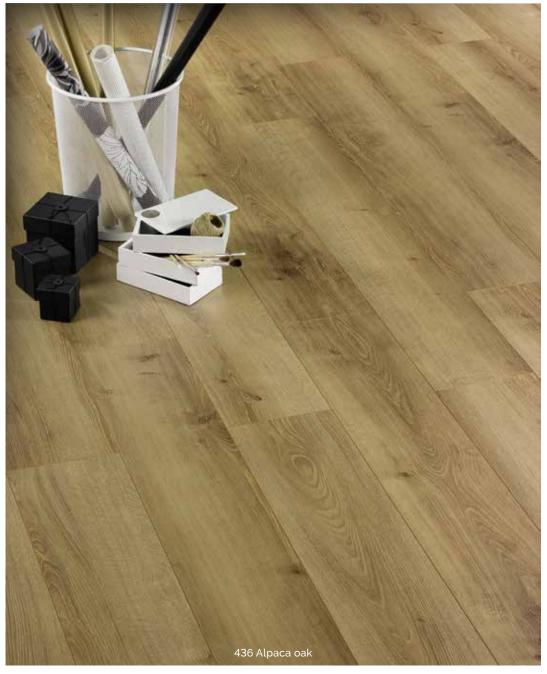

- An **8 mm** plank thickness designed for installation in all types of interiors.
- High resistance in 23/33 AC5.
- Bevelled on the sides.
- · Water resistant













Ensure to follow the installation rules.





















TECHNICAL FEATURES

length: 1290 mm

width: 192 mm

support: hdf - water resistant boards/kit: 9 sqm/kit: 2,23 weight/kit: 16 kg

NEW HARMONIE MEDIUM

WATER RESISTANT NARROW PLANKS 122MM WIDE!



- · An **8 mm** plank thickness designed for installation in all types of interiors.
- High resistance in 23/33 AC5.
- Bevelled on the 4 sides.
- · Water resistant











Ensure to follow the installation rules.





















702

TECHNICAL FEATURES


length: 1290 mm


width: 122 mm

support: hdf - water resistant boards/kit: 9 sqm/kit: 1,42 weight/kit: 10 kg

PATTERNS



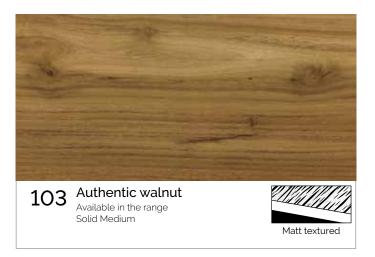


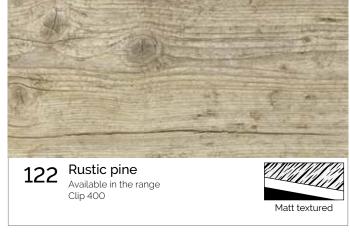







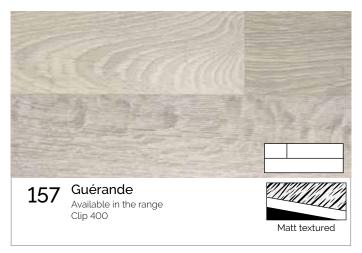






































441 Lady oak

Forte

Available in the range

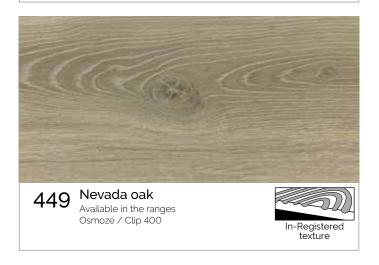

Matt textured






Matt textured

Clip 400






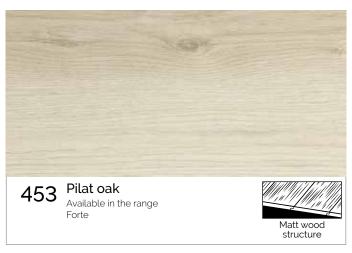





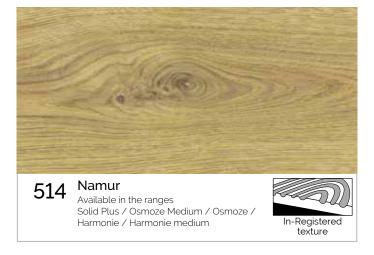





































































Structures









701 / 702

and produces an effect of authenticity.

Technical features

	DANCE OF	12 mm							
	RANGE OF PRODUCTS	Herringbone	Forte	Solid Plus	Solid Chic				
ES	Warranty	35 years	35 years	35 years	35 years				
FEATURES	Profile and assembly	5G®	5G®	5G®	5G®				
-EA	Texture: surface aspect		—— Depends on	the decor ———					
	Bevels	4 Bevels	No	4 Bevels	4 Bevels				
	Quality		— DPL standara						
	Panel								
	Total thickness in mm	12	12	12	12				
	Dimension of the board in mm	640 x 143	1286 x 214	1286 x 214	1286 x 172				
STS	Class of use	23/33	23/33	23/33	23/33				
) 	Abrasion resistance • EN 13329	AC6	AC6	AC6	AC6				
	Impact resistance • EN 13329	IC3	IC3	IC3	IC3				
	Resistance to chemical agents • EN 438	← Gr	oup 1/2:5 - Grou	up 3 : 4 ————					
	Resistance to cigarettes burns • EN 438-2-18		—— Degree 4 –						
	Resistance to light effect • EN 438-2-16		—— Degree ≥ 6 ⁽²⁾						
	Thermal resistance sqm K/W		≤ O,15 —						
	Substrate formaldehyde content • EN 120	← Inoffensive, E1 quality - 8 mg/100 g							
	Laminate flooring formaldehyde emission • NF EN717-2	— E1 ≤ 3,5 mg/m². h							
	Reaction to fire - Fire report • EN13501-1	Laminate flooring fitted with underlays included in the fire report: Cfl S1							
	Declaration of conformity – CE labeling CE ⁽³⁾	Yes	Yes	Yes	Yes				
	Traceability PEFC ⁽⁴⁾	Yes	Yes	Yes	Yes				
	Health safety labelling ⁽⁵⁾		– A+ Class —						
CS	Boards per kit	13	6	6	6				
LOGISTICS	Area per kit in sqm	1,19	1,65	1,65	1,33				
0	Weight per kit in kg	12,20	18	18	14				
	Kit packaging	box	box	box	box				
	Number of kit per pallet	60	48	48	52				
	Area per pallet in sqm	71,40	79,30	79,30	69				
	Weight pallet in kg	732	864	864	728				



This information is given for information purpose only and specifications are liable to change without warning.

*Locking assembly + tapped into position.


- (1) WP : Water protect
- ⁽²⁾ Blue wool scale part BO2 \geq 6. Grey scale, part AO2 \geq 4.
- $^{(3)}$ EC marking declaration of conformity available on request on our website. All our products comply with the EN 14041.
- (4) Our products are made from wood taken from sustainably managed forests.
- (5) Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).

12mm		8 n		8 mm Water Resistant			
Solid Medium	Osmoze Medium	Osmoze	Clip 400	Vintage	Harmonie	Harmonie Medium	
35 years	25 years	25 years	25 years	25 years	25 years	25 years	
5G®	5G®	5G®	5G®	5G®	Clip A*	Clip A*	
	Deper	nds on the decor —		\rightarrow	In-Registered	In-Registered	
4 Bevels	4 Bevels	4 Bevels	No	No (with 4 bevels for 512 and 552)	4 Bevels	4 Bevels	
	DPL	_ standard ———				\rightarrow	
	HL	DF - WP ⁽¹⁾		\rightarrow	← HD Water R	Pesistant	
12	8	8	8	8	8	8	
1286 x 122	1286 x 122	1286 x 192	1286 x 192	1286 x 192	1290 x 192	1290 x 122	
23/33	23/33	23/33	23/33	23/33	23/33	23/33	
AC6	AC5	AC5	AC5	AC5	AC5	AC5	
IC3	IC3	IC3	IC3	IC3	IC3	IC3	
	Group 1/2:5 - Group 3:4						
	D	egree 4 ————				>	
	Do	egree ≥ 6 ⁽²⁾				\rightarrow	
	≤ 0,15					\rightarrow	
	– Inoffensive, E1 quality - 8 mg/100 g		g ————			\rightarrow	
	E1 ≤	3,5 mg/m². h ——				\rightarrow	
Lc	minate flooring fitted	with underlays inclu	ded in the fire report:	Cfl S1 —		\rightarrow	
Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	A+ (Class ————					
6	9	9	9	9	9	9	
0,94	1,41	2,22	2,22	2,22	2,23	1,42	
10	10	16	16	16	16	10	
box	box	box	box	box	box	box	
78	78	48	48	48	48	78	
73,40	110,14	106,70	106,70	106,70	107	110,76	
780	780	768	768	768	768	780	

_		The un	usuals	12 mm		8 mm							
Ra 20	anges 020	Herring- bone	Mix widths	Forte	Solid Plus	Solid Chic	Solid Medium	Osmoze Medium	Osmoze	Clip 400	Vintage	Harmonie	Harmonie Medium
		P10	P11	P13	P14-15	P16	P17	P19	P20-21	P22-23	P24	P26	P27
103	Authentic walnut						•						
122	Rustic pine									•			
140	Congo oak								•				
153	Celtic oak									•			
157	Guérande									•			
161	White pine									•			
183	Everest									•			
330	Landhausdiele oak									•			
401	Spanish oak								•				
408	Esperanto									•			
409	Cassandre			•						•			
410	Alpes' oak								•				
414	Vintage			•			•				•		
417	Doussie Africa									•			
420	Taza oak								•				
435	Jefferson	•	•		•	•	•						
436	Alpaca oak			•				•	•			•	•
437	Grey building			•				•	•			•	
441	Lady oak			•									
447	Malt oak			•			•						
448	Grey oak								•	•		•	
449	Nevada oak								•	•			
450	Nature oak			•					•	•		•	
453	Pilat oak			•									
456	Provence oak									•			
471	Sunset	•	•		•	•	•						
500	Cognac oak								•				
502	White cotton									•			
512	White fjord										•		
514	Namur				•			•	•			•	•
517	White limed grey									•			
518	Rafia				•				•	•			
520	Chocolate walnut									•			
528	Chestnut oak				•			•	•				•
529	Almond oak				•			•	•			•	•
533	Cheverny										•		
535	Praline oak	•	•		•	•	•	•	•				•
536	Linen oak				•			•	•			•	
538	Batik										•		
540	Inside			•									
541	Coco oak				•			•	•				•
542	Aronia oak	•	•		•	•	•	•	•				•
544	Wood stain oak										•		
550	Trade wind										•		
552	Fado										•		
553	Black charleston										•		
554	Grey charleston										•		
557	Black pine									•			
619	Sardinia oak	•	•		•	•	•						
620	Corsica oak				•								
621	Canaries oak				•		•						
622	Balearic oak	•	•		•	•	•						
625	Corfou				•								
626	Jersey				•								
627	Polar oak	•	•		•	•	•						
628	Majorca oak				•								_
701	Plato N											N	N
702	Aristotle N											N	N

For a better understanding

PRODUCT CROSS-SECTIONS

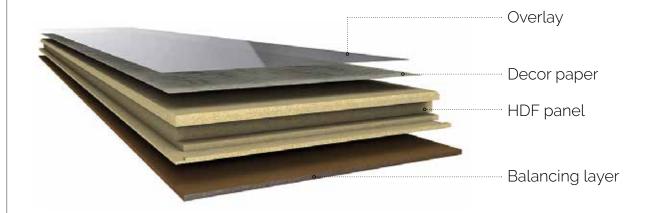

PICTOGRAMS TO MAKE LIFE EASIER!







Suitable for laying with underfloor heating



Dust-mites free



Panel average density



The boards are bevelled lengthwise and widthwise to produce an authentic look of the flooring of yesteryear. The joints are lacquered for easy cleaning and optimized tightness.






Classes of use: Heavy domestic and commercial use.



The wax layer on both sides of the joint creates a seal and prevents water ingress.



Compatible with damp areas due to protection of the joints: click fitting, paraffin wax in the grooves and water repellent paint applied to the V-groove edges.



The 5G® locking system enables a significantly fast and easy installation. A reinforced plastic tongue on the short side of the floor panel results in a strong and robust locking, emitting a "click" sound and locking the planks vertically.



Click assembly combined with tapping into position of the ends



'Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).



The EC symbol on all our products certifies that they are produced in compliance with currently applicable standards and that they can move freely between countries within the European Community.



Our products are made from wood taken from sustainably managed forests and PEFC certified.

The accessories

SKIRTINGS AND SCOTIES, COORDINATED WITH EACH FLOORING DESIGNS



SKIRTING 58 MM

Dim: 2200 x 58 x 12 mm X 5 skirtings = 11 ml Installation: to clip, tack, screw or glue.



SKIRTING 80 MM

Dim: 2200 x 80 x 15 mm X 5 skirtings = 11 ml Installation: to clip, tack, screw or glue.



SCOTIES

Dim: 2200 x 16 x 16 mm X 10 skirtings = 22 ml Installation: to tack, screw or glue.

HDF-COATED PROFILES, COORDINATED WITH EACH FLOORING DESIGNS



TRANSITION SECTION PROFILE

Lenght: 900 or 1800 mm. X 10 units, film-wrapped, PVC base and hardware included. Concealed slot-in installation with PVC base. Sold individually



T-SECTION PROFILE

Lenght: 900 or 1800 mm. X 10 units, film-wrapped, PVC base and hardware included. Concealed slot-in installation with PVC base. Sold individually

Also available for 12mm thick flooring ranges

The accessories

UNDERLAYS



ALSAPROTECT

THE INDISPENSABLE

1 box = 20 sqm


An indispensable part of any laminate or parquet flooring installation. It prevents moisture rising. (150 μ thick).

ALSAPLUS

2 IN 1

1 roll = 20 sqm

Compensates uneven surfaces and provides heat insulation. It comes ready-fitted with a vapour barrier (150µ thick).

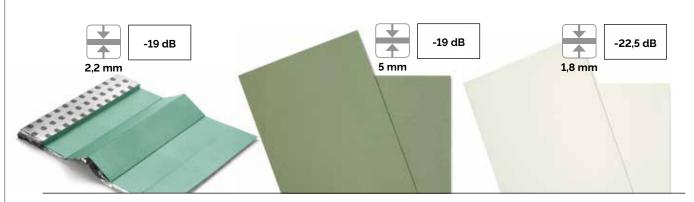

AQUASTOP

ACOUSTIC AND THERMIC

1 box = 6 sqm

Compensates uneven surfaces and provides heat insulation. It comes ready-fitted with a vapour barrier.

FLOORISOL

ACOUSTIC, THERMIC AND ECOLOGICAL

1 box = 7 sqm

This wood-fibre underlay is ecological and 98% natural. It provides both thermal and acoustic insulation. It will reduce impact noise.

CONFORLAY

ACOUSTIC, THERMIC AND ECOLOGICAL

1 box = 7 sqm

This wood-fibre underlay is ecological and 100% natural. It provides both thermal and acoustic insulation. It will reduce impact noise. It can also be used with vinyl flooring.



For more information please see our **Accessories** catalogue.

Vinyl collection



Engineered wood collection





ALSAFLOOR

Z.I. - 1 rue de l'Europe - 67521 Marlenheim Cedex - France tel. +33 (0)3 88 59 29 89 - fax. +33 (0)3 88 59 28 49

www.alsapan.com

